

Dayton Audio Contractor Series



- Tuned port for impressive bass
- Quick and easy mounting
- Paintable white grills
- Ideal for background music

The Dayton Audio Contractor Series offers affordable, great sounding speakers with the quality you've come to expect from Dayton Audio.

CS420EC 4" and CS620EC 6-1/2" Enclosed Coaxial Ceiling Speakers

- UL94 high temperature rated enclosure
- Gold plated spring loaded binding posts
- Available in 8 ohm version or with a 70V transformer

CS420EC: • Power handling: 20 watts RMS/40 watts max • Impedance: 8 ohms • Frequency response: 60-20,000 Hz • Dimensions: 8-1/2" dia. x 5-7/8" D • Cutout size: 6-5/8" dia. • Sold individually.

CS620EC: • Power handling: 25 watts RMS/50 watts max • Impedance: 8 ohms • Frequency response: 60-20,000 Hz • Dimensions: 11" dia. x 7" D • Cutout size: 9-9/16" dia. • Sold individually.



Part #	Mfg. #	Description	List Price	Price (1-3)	Price (4-UP)
300-414	CS420ECT	With 70V transformer	\$59.99	\$42.70	\$35.89
300-415	CS420EC	8 ohm	49.99	34.75	29.87
300-416	CS620ECT	With 70V transformer	89.99	58.70	52.82
300-417	CS620EC	8 ohm	79.99	51.75	46.70

CS650EC 6-1/2" 2-Way Enclosed Ceiling Speaker Pair

- 6-1/2" poly treated cone
- 1" mylar tweeter
- Easy installation
- Add music to the kitchen, den, bath, or patio!



These great sounding ceiling speakers are ideal for adding music to the kitchen, den, bath, or patio! They feature a 6-1/2" poly treated cone with a butyl rubber surround and a coaxially mounted 1" mylar dome tweeter. Retrofit design allows installation in both new and existing construction in just minutes. The rear of the speaker is protected from dust, debris and insulation during and after construction by the rear enclosure. System includes removable steel mesh grills and built-in mounting brackets.

Specifications: • Power handling: 25 watts RMS/50 watts max • Impedance: 8 ohms • Frequency response: 100-20,000 Hz • SPL: 86.5 dB 1W/1m • Dimensions: 9-1/2" dia. x 6" D • Cutout size: 8-1/4" dia. • Sold in pairs.

#300-418 \$129.99 LIST **\$99.50** (1-3 PRS) **\$94.77** (4 PRS-UP)

CS622C 6-1/2" Dual-Channel Ceiling Speaker

- 6-1/2" dual voice coil woofer
- Dual 3/4" textile dome tweeters
- Stereo sound in a single speaker package
- Weatherized for high moisture environments

Specifications: • Power handling: 25 watts RMS/50 watts max • Impedance: 8 ohms • Frequency response: 60-20,000 Hz • SPL: 89 dB 1W/1m • Dimensions: 8-3/8" dia. x 2-7/8" D • Cutout size: 7-3/8" dia. • Sold individually.

#300-412 \$59.99 LIST **\$39.50** (1-3) **\$35.90** (4-UP)



CS620W 6-1/2" 2-Way In-Wall Speaker Pair

- Our most popular in-wall speaker
- 1" mylar dome tweeter
- 6-1/2" polypropylene woofer
- Great power handling and sensitivity



Specifications: • Power handling: 60 watts RMS/85 watts max • Impedance: 8 ohms • Frequency response: 50-20,000 Hz • SPL: 89 dB 1W/1m • Dimensions: 12" H x 8-1/2" W x 3-1/2" D • Cutout size: 10-3/4" H x 7-1/4" W • Sold in pairs.

#300-036 \$99.99 LIST **\$67.70** (1-3 PRS) **\$55.40** (4 PRS-UP)

In-Wall Subwoofers

- 8" mica cone driver
- Popular "dog-ear" mounting system
- Great low-end frequency response
- Power handling: 80 watts RMS



With a satellite speaker output, this subwoofer can stand alone or can be used in conjunction with an in-wall, in-ceiling or bookshelf speaker.

Specifications: • Power handling: 80 watts RMS/150 watts max • Impedance: 8 ohms • Frequency response: 70-200 Hz • SPL: 88 dB 1W/1m • Dimensions: 10" H x 10" W x 4-3/8" D • Cutout size: 8-1/2" H x 8-1/2" W.

#300-406 (CS8SW-8 Single voice coil) \$69.99 LIST **\$53.70** (1-3) **\$44.75** (4-UP)

#300-407 (CS8SW-88 Dual voice coil) \$88.99 LIST **\$68.20** (1-3) **\$56.83** (4-UP)

Coaxial Ceiling Speaker Pairs

- 1" mylar tweeter
- Carbon fiber woofer
- Popular "dog-ear" mounting system
- 70V version for commercial applications includes the transformer
- 70V taps can be set at 0.62W, 1.25W, 2.5W, 5W, 10W




Specifications: • Power handling 30 watts RMS/45 watts max • Impedance: 8 ohms • SPL: 89 dB 1W/1m • Sold in pairs.

6-1/2" Speakers: • Frequency response: 60-20,000 Hz • Dimensions: 8-1/2" dia. x 2-3/4" D • Cutout size: 7-3/8" dia. **8" Speakers:** • Frequency response: 50-20,000 Hz • Dimensions: 10-3/4" dia. x 3-5/8" D • Cutout size: 9-1/8" dia.

Part #	Mfg. #	Description	Size	List Price	Price (1-3)	Price (4-UP)
300-402	CS620C	8 ohm	6-1/2"	\$69.99	\$46.80	\$43.45
300-400	CS620CT	70V	6-1/2"	79.99	52.80	49.50
300-404	CS820C	8 ohm	8"	99.99	64.89	58.40
300-405	CS820CT	70V	8"	99.99	69.89	63.90

6-1/2" Quick Mount Coaxial Ceiling Speaker Pairs

- Pivoting silk dome tweeter
- Poly mica cone woofer
- Unique spring-loaded mounting system for ceilings up to 1" thick
- 70V version for commercial applications includes transformer
- 70V taps can be set at 5W, 10W, 20W

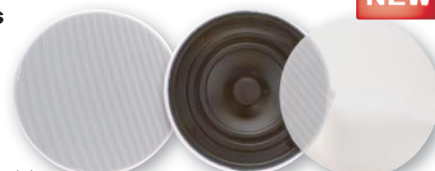

The unique spring loaded mounting system of the Quick Mount Coaxial Ceiling Speakers enables you to mount the speakers into the hole in mere seconds. The low-profile trim ring around the speaker grill is only 1/4" allowing these speakers to blend into the décor of any environment.

Specifications: • Power handling 40 watts RMS/80 watts max • Impedance: 8 ohms • Frequency response: 45-20,000 Hz • SPL: 86 dB 1W/1m • Dimensions: 9-1/4" dia. x 3" D • Cutout size: 8-3/8" dia. • Sold in pairs.

Part #	Mfg. #	Description	List Price	Price (1-3)	Price (4-UP)
300-420	QM650C	8 ohm	\$103.99	\$79.40	\$73.00
300-422	QM650CT	70V	115.99	88.75	82.80