

Overview

A 6-channel live streaming mixer with USB audio interface.



Features

- Two condenser microphones can be used simultaneously
- +48 V phantom power on CH1-2 input for condenser mics or DI boxes
- Hi-Z input for guitars on CH2
- High resolution (24-bit, 192 kHz) 2-track audio recording and playback
- 4-pole mini input/output (TRRS) to support a wider range of streaming applications
- Flexible inputs and LOOPBACK function ideal for live streaming or recording
- Mute button for convenient live streaming
- Easy control and pro sound with 1-TOUCH effects (COMP/EQ, REVERB and Amp Simulator)
- AG Controller (Windows/Mac/iOS) for precise parameter control
- Windows/Mac support by USB-C connection
- iOS connectivity via Apple Camera Adapter (requires external USB power supply)
- Android supported by 4-pole mini input/output (TRRS)
- USB-C power input (5 V DC, 900 mA)
- Cubase AI, WaveLab Cast, Cubasis LE and Rec'n'Share are available

Specifications

1/2

General Specifications

0 dBu = 0.775 Vrms, Output impedance of signal generator (Rs) = 150 Ω

All level controls are nominal if not specified.

Frequency Response	Input (MIC) to MONITOR OUT via USB IN/OUT	+0.5 dB/-1.5 dB (20 Hz to 48 kHz @ Fs = 192 kHz), refer to the nominal output level @ 1 kHz, GAIN knob: Min, STREAMING OUT: DRY CH1-2
Total Harmonic Distortion *1 (THD+N)	Input to MONITOR OUT	0.05 % @ 0 dBu (20 Hz to 20kHz), GAIN knob: Min 0.01 % @ +4 dBu (1kHz), GAIN knob: Min
Hum&Noise *2 (20 Hz to 20 kHz)	Equivalent Input Noise	-128 dBu (Mono Input Channel, Rs: 150 Ω, GAIN knob: Max)
	Residual Output Noise	-103 dBu (MONITOR OUT, MONITOR knob: Min)
Crosstalk (1 kHz) *3		-80 dB
Input Channels		Mono (MIC/LINE): 2 including HEADSET MIC (Plug-in Power) (CH1 MIC and HEADSET MIC cannot be used simultaneously.), Stereo (LINE): 2, USB IN: 1, AUX INPUT: 1
Output Channels		STEREO OUT: 1, MONITOR OUT: 1, PHONES: 2 including HEADSET PHONES (PHONES and HEADSET PHONES cannot be used simultaneously.), AUX OUT: 1
Input Channel Function (CH1, CH2G)	PAD	26 dB
	DSP	CH1: COMP/EQ, REVERB, MUTE CH2: COMP/EQ *4, AMP SIM, REVERB, MUTE
	PEAK LED	LED turns on when the signal reaches 3 dB below clipping level.
Level Meter	USB OUTPUT level	2x2 point LED meter [PEAK, SIG]
USB Audio	2 IN / 2 OUT	USB Audio Class 2.0 compliant, Sampling Frequency: Max 192 kHz, Bit Depth: 24-bit
Phantom Power Voltage		+48 V
FOOT SW		REVERB ON/OFF or MUTE (CH1) ON/OFF
Power Requirements		DC 5V, 900 mA
Power Consumption		Max. 4.5 W
Dimensions (W x H x D)		152 mm × 63 mm × 201 mm (6.0" x 2.5" x 7.9")
Net Weight		0.9 kg (2.0 lbs.)
Included Accessory		USB2.0 cable (1.5m), Quick Guide, Safety Guide, WaveLab Cast Download Information, Cubase AI Download Information
Optional Accessory		Foot Switch: FC5, Mic Stand Adaptor: BMS-10A
Operating Temperature		0 to +40°C

*1 THD+N is measured with 22 kHz LPF.

*2 Noise is measured with A-weighting filter.

*3 Crosstalk is measured with 1 kHz band pass filter.

*4 No switch or knob on the front panel.

Specifications

2/2

Analog Input Characteristics

0 dBu = 0.775 Vrms

Input Jacks	PAD 26 dB	GAIN Trim/SW Position	Actual Load Impedance	For Use with Nominal	Input level			Connector
					Sensitivity *1	Nominal	Max. before Clip	
MIC/LINE 1-2 HEADSET MIC	OFF	10	3 kΩ 1.5 kΩ *4	50-600 Ω Mics/Lines	-72 dBu (0.195 mV)	-60 dBu (0.775 mV)	-50 dBu (2.451 mV)	Combo jack *2 (Balanced) 3.5 mm Phone jack For HEADSET MIC (Plug-in Power / Unbalanced)
		0			-26 dBu (38.84 mV)	-14 dBu (154.6 mV)	-4 dBu (489.0 mV)	
	ON	10			-46 dBu (3.884 mV)	-34 dBu (15.46 mV)	-24 dBu (48.90 mV)	
		0			0 dBu (775.0 mV)	+12 dBu (3.085 V)	+22 dBu (9.757 V)	
INPUT CH2 GUITAR *5	OFF	10	1MΩ	-	-68 dBu (3.085 mV)	-56 dBu (1.228 mV)	-46 dBu (3.884 mV)	Phone jack *2 (Unbalanced)
		0			-22 dBu (61.56 mV)	-10 dBu (245.1 mV)	0 dBu (775.0 mV)	
	ON	10			-42 dBu (6.153 mV)	-30 dBu (24.51 mV)	-20 dBu (77.50 mV)	
		0			+4 dBu (1.228 V)	-	+10 dBu (2.451 V)	
LINE 3/4, 5/6	-	HIGH	10 kΩ	600 Ω Lines	-20 dBu (77.50 mV)	-8 dBu (308.5 mV)	+2 dBu (973.7 mV)	LINE 3/4 Phone jack *3 (Unbalanced)
		LOW			-10 dBu (245.1 mV)	+2 dBu (975.7 mV)	+12 dBu (3.085 V)	
AUX INPUT	-	-	10 kΩ	600 Ω Lines	-14 dBu (154.6 mV)	-8 dBu (308.5 mV)	+2 dBu (975.7 mV)	3.5 mm Phone jack *6 (CTIA)

*1 Sensitivity is the lowest level that will produce an output of +0dBu (0.775V) or the nominal output level when the unit is set to maximum gain. (All level controls are at their maximum position.)

*2 1&Sleeve = GND, 2&Tip = HOT, 3&Ring = COLD

*3 Tip = Signal, Sleeve = GND

*4 For CH1, HEADSET MIC

*5 For CH2, GUITAR switch is ON

*6 Tip = Signal L, Ring1 = Signal R, Ring2 = GND, Sleeve = Output for Smartphone

Analog Output Characteristics

0 dBu = 0.775 Vrms

Output Terminals	Actual Source Impedance	For Use with Nominal	Output Level		Connector
			Nominal	Max. before Clip	
STEREO OUT [L, R]	150 Ω	10 kΩ Lines	0 dBu (0.775 V)	+10 dBu (2.451 V)	Phone jack *7 (Impedance Balanced)
MONITOR OUT [L, R]	150 Ω	10 kΩ Lines	0 dBu (0.775 V)	+10 dBu (2.451 V)	Phone jack *7 (Impedance Balanced)
PHONES	120 Ω	40 Ω Phones	1.5 mW + 1.5 mW	6 mW + 6 mW	Phone jack 3.5 mm Phone jack
AUX OUT	150 Ω	1.5 kΩ Line	-30 dBu (24.51mV)	-20 dBu (77.50mV)	3.5 mm Phone jack *8 (CTIA)

*7 Tip = HOT, Ring = COLD, Sleeve = GND


*8 Tip = Signal L, Ring1 = Signal R, Ring2 = GND, Sleeve = Output for Smartphone

Digital Input / Output Characteristics

Terminals	Format	Data Length	Fs	Connector
USB	USB Audio Class 2.0 / Yamaha Steinberg USB Driver	24-bit	44.1 kHz, 48 kHz, 88.2 kHz, 96 kHz, 176.4kHz, 192 kHz	USB Type-C

Dimensions

Unit: mm (inch)

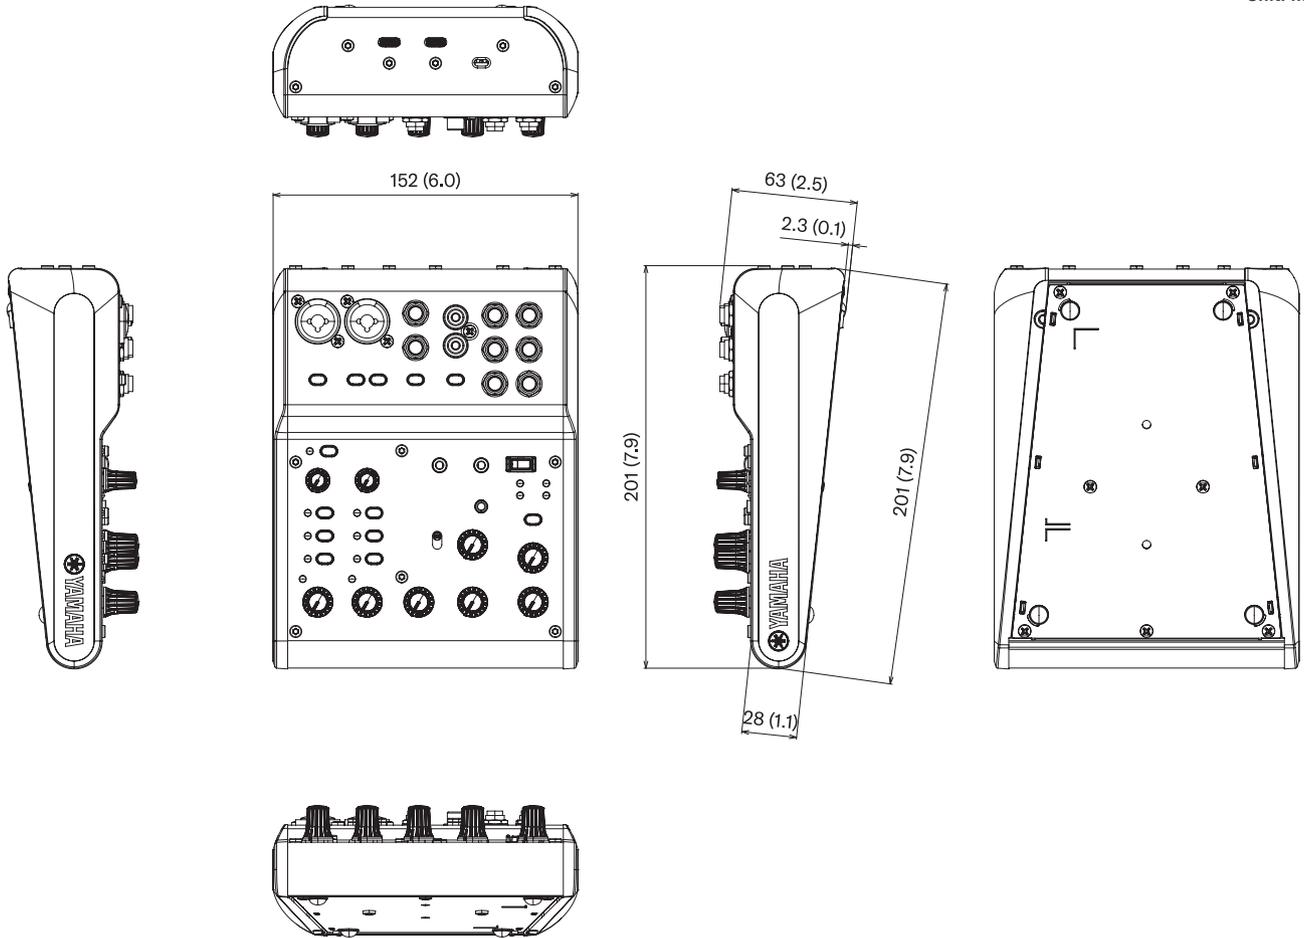

Option

- Mic Stand Adaptor BMS-10A
- Foot Switch FC5


Software

- AG Controller
- Steinberg Cubase AI
- Steinberg WaveLab Cast
- Steinberg Cubasis LE
- Rec'n'Share

Architectural and Engineering Specifications

The Yamaha AG06MK2 shall be a 6-channel Live Streaming Mixer with an integrated USB audio interface and built-in signal processing optimized for live streaming applications. The AG06MK2 shall have six inputs: 2 mono and 2 stereo. Mono signals shall be input to channels 1 and 2 via combo connectors that accept line input or microphone input with switchable 48-volt phantom power. Mono signals shall also be input to channel 1 via a 3.5 mm stereo mini jack that accepts input from a plug-in powered headset microphone. A switch shall be provided that allows the channel 2 input to accept Hi-Z mono guitar input. Stereo line level input to channels 3/4 shall be input via a pair of 6.3 mm phone jacks. Stereo line level input to channels 5/6 shall be input via a pair of RCA jacks. A 4-pole mini jack (TRRS) shall be provided for smartphone connection. Digital connectivity shall be provided via a bus-powered USB-C connector, and a second USB-C connector shall be provided for 5V DC power input when bus power is not available. Stereo digital audio output shall be delivered via the primary USB-C connector. Stereo analog output shall be delivered via a pair of 6.3 mm phone jacks for main stereo output, a pair of 6.3 mm phone jacks for monitor output, a 6.3 mm stereo phone jack headphone output, and a 3.5 mm mini stereo jack headphone output. A mute button and STREAMING OUT selector and mix minus function shall be provided. The AG06MK2 microphone preamplifier shall be a discrete class-A “D-PRE” type for high sound quality. 1-touch compression/EQ, effects, and amp simulation shall be included for convenient signal processing. An AG Controller app for Windows/Mac and iOS devices shall be available, providing detailed controlled of internal AG06MK2 DSP functions. A loopback function shall be included to allow simultaneous input, mixing, and output of digital audio for enhanced live recording and streaming flexibility. The AG06MK2 shall be equipped with a 24-bit/192-kHz USB digital audio interface for 2-track recording and playback. The AG06MK2 shall be powered via USB bus power from a Mac or Windows based personal computer, as well as a 5V DC adaptor. Dimensions shall be 152 (W) x 201 (D) x 63 (H) mm. Weight shall be 0.9 kg.

Block Diagrams

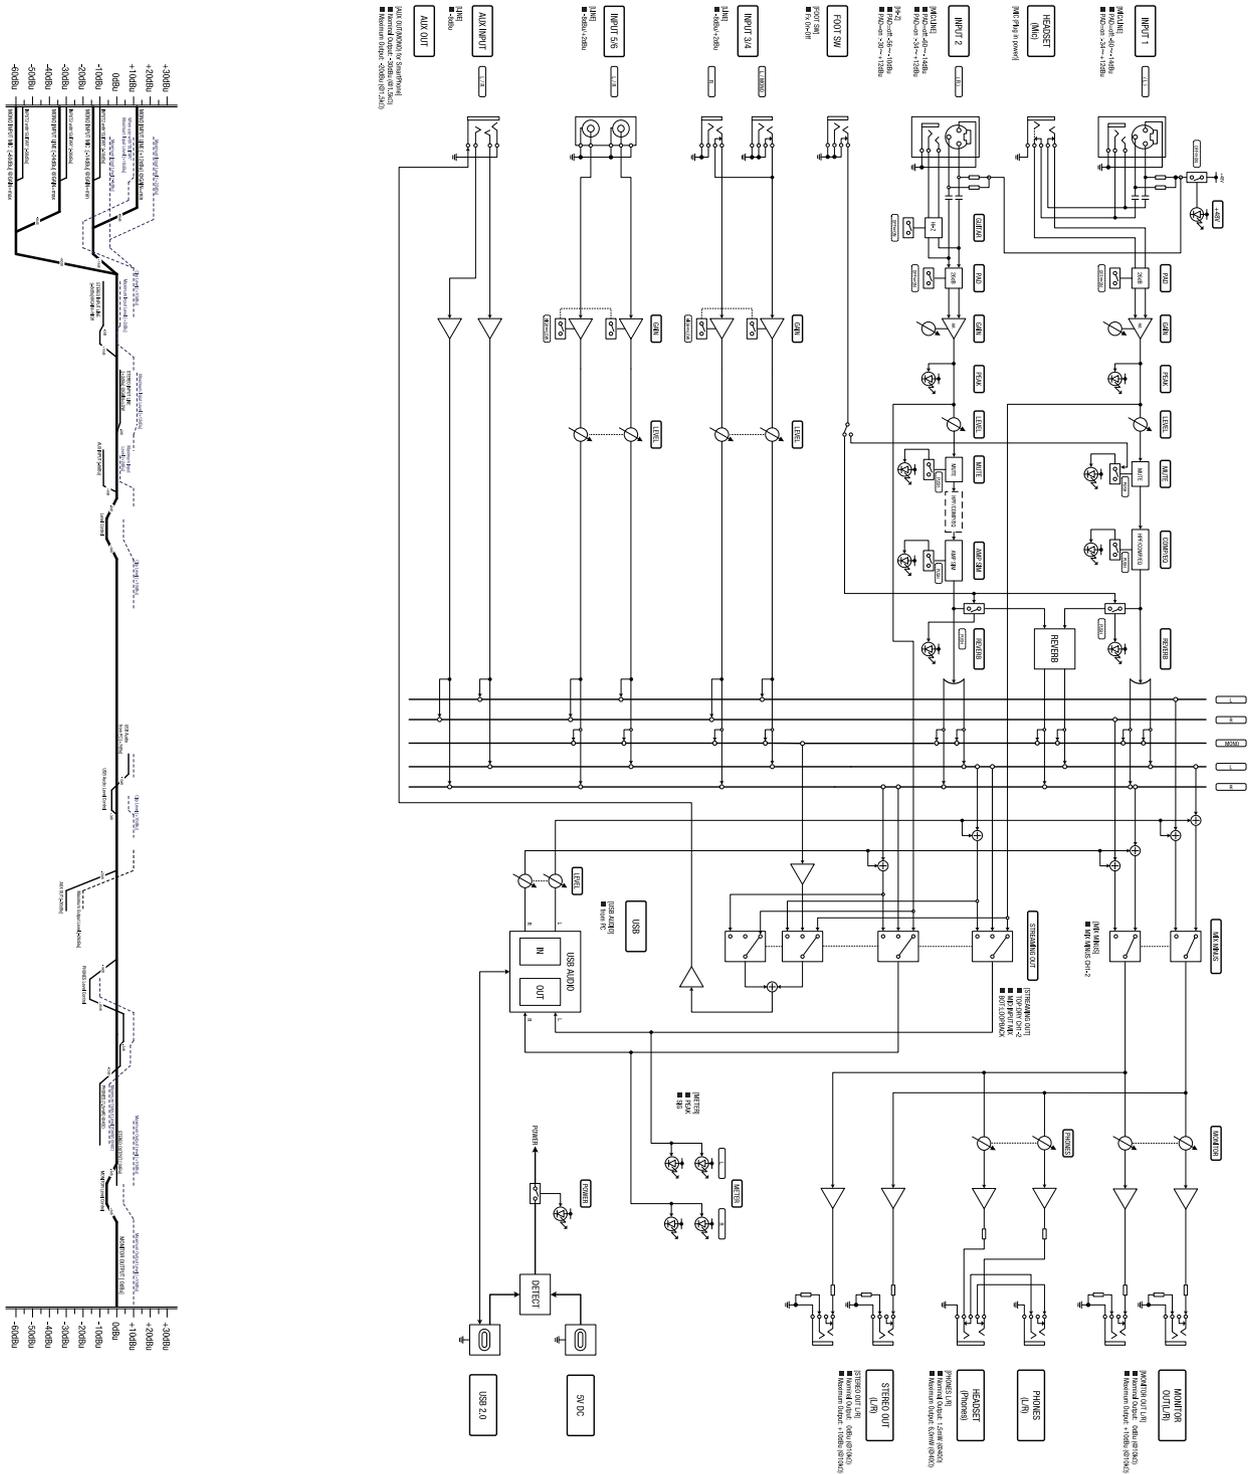

*All information subject to change without notice.
 *All trademarks and registered trademarks are property of their respective owners.
 Created in May, 2022