

Large Diameter 2-to-1 Heat Shrink Tubing

Great for insulating and sealing electrical connections. Excellent for wire harness marking. 2-to-1 ratio will accommodate large and irregular shapes. Low 115°C shrink temperature. Standard operating temp: -55°C to +135°C, and up to 200°C for short durations. Made of flexible polyolefin. Available in Black or Clear. The Clear is NOT flame retardant; the Black is flame retardant and UL recognized to 125°C, 600V. Sold per ft.



Part #	Pre-Shrink Dia.	Color	Price (1-3)	Price (4-UP)
080-700	2"	Clear	\$2.90	\$2.55
080-702	2"	Black	2.90	2.55
080-704	3"	Clear	5.85	5.15
080-706	3"	Black	5.85	5.15
080-708	4"	Clear	7.60	6.69
080-710	4"	Black	7.60	6.69

3M 2-to-1 Heat Shrink Tubing



Original general purpose heat shrink tubing. Shrinks to half its original size (2 to 1). UL recognized to 600V at 125°C. 4 ft. lengths with header. Mfg. #FP-301H.

Part #	Dia.	Color	Price (1-9)	Price (10-49)	Price (50-UP)
082-010	1/16"	Black	\$1.44	\$1.19	\$1.05
082-012	1/16"	Blue	1.44	1.19	1.05
082-014	1/16"	Clear	1.44	1.19	1.05
082-016	1/16"	Red	1.44	1.19	1.05
082-018	1/16"	White	1.44	1.19	1.05
082-020	1/16"	Yellow	1.44	1.19	1.05
082-022	1/8"	Black	1.67	1.36	1.18
082-024	1/8"	Blue	1.67	1.36	1.18
082-026	1/8"	Clear	1.67	1.36	1.18
082-028	1/8"	Red	1.67	1.36	1.18
082-030	1/8"	White	1.67	1.36	1.18
082-032	1/8"	Yellow	1.67	1.36	1.18
082-034	1/4"	Black	2.38	2.08	1.72
082-036	1/4"	Blue	2.38	2.08	1.72
082-038	1/4"	Clear	2.38	2.08	1.72
082-040	1/4"	Red	2.38	2.08	1.72
082-042	1/4"	White	2.38	2.08	1.72
082-044	1/4"	Yellow	2.38	2.08	1.72

Part #	Dia.	Color	Price (1-9)	Price (10-49)	Price (50-UP)
082-046	1/2"	Black	\$3.23	\$2.67	\$2.22
082-048	1/2"	Blue	3.23	2.67	2.22
082-050	1/2"	Clear	3.23	2.67	2.22
082-052	1/2"	Red	3.23	2.67	2.22
082-054	1/2"	White	3.23	2.67	2.22
082-056	1/2"	Yellow	3.23	2.67	2.22
082-058	3/4"	Black	3.79	3.31	2.80
082-060	3/4"	Blue	3.79	3.31	2.80
082-062	3/4"	Clear	3.79	3.31	2.80
082-064	3/4"	Red	3.79	3.31	2.80
082-066	3/4"	White	3.79	3.31	2.80
082-068	3/4"	Yellow	3.79	3.31	2.80
082-070	1"	Black	5.29	4.40	3.85
082-072	1"	Blue	5.60	4.66	4.08
082-074	1"	Clear	5.60	4.66	4.08
082-076	1"	Red	5.60	4.66	4.08
082-078	1"	White	5.60	4.66	4.08
082-080	1"	Yellow	5.60	4.66	4.08

3M 2-to-1 Heat Shrink Tubing with Adhesive Liner

This unique heat shrink is a 2:1 thin wall tubing with an integral adhesive lined construction. Ideal for use in protecting electronic components, wire splices, or wire bundles. Heat to 250°F (77°C) for a skintight fit. When cool, tube is flame retardant, flexible, and provides a waterproof barrier. Color: black. Sold in 4 ft. lengths.



Part #	Dia.	Price (1-3)	Price (4-19)	Price (20-UP)
080-110	1/8"	\$3.60	\$3.27	\$3.01
080-111	3/16"	3.93	3.55	3.25
080-112	1/4"	4.94	4.44	4.08
080-113	3/8"	5.45	5.06	4.59
080-114	1/2"	6.35	5.57	5.28
080-115	3/4"	8.72	7.81	7.23
080-116	1"	12.94	11.64	10.60

NTE Heat Shrink 2:1 Black Assorted Sizes 2-1/2" 158 Pc. Box

The NTE assorted heat shrink box offers installers and DIY enthusiasts a simple and convenient way to buy heat shrink. The assortment packs offer 158 2-1/2" long pieces of heat shrink in 6 sizes: 1/16 (60 pieces), 1/8 (40 pieces), 3/16 (20 pieces), 1/4 (18 pieces), 3/8 (10 pieces), and 1/2 (10 pieces). The shrink temperature is 194°F/90°C with an operating temperature range of -67°F/-55°C to 275°F/135°C. UL listed. Available in black or red.



NTE
ELECTRONICS, INC.

Specifications: • 2:1 shrink ratio • Resistant to common fluids and solvents • Flame retardant • Seals and protects • UL listed.

#080-722 \$12.00 LIST **\$10.00** (1-3 KIT) **\$8.95** (4-UP KIT)


Parts & Accessories

Wire Management

3-to-1 Heat Shrink Tubing

- Flame retardant
- UL recognized to 125°C, 600V
- 6" lengths


Great for insulating and sealing solder or solderless connections. Excellent for wire marking. 3-to-1 ratio will accommodate large and irregular shapes. Low 90°C shrink temperature as compared to other brands that require 121°C. Made of flexible polyolefin. Available in various colors.

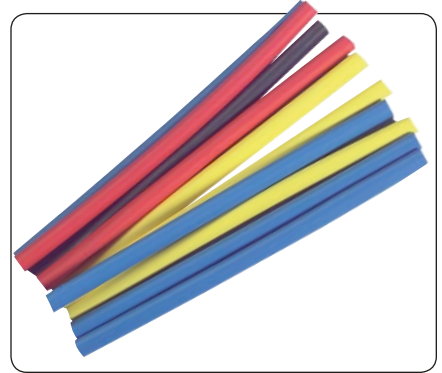

Part #	Pre-Shrink Size (I.D.)	Color	Pkg Qty	Price (1-3)	Price (4-19)	Price (20-UP)
080-610	3 mm (.12")	Black	8	\$2.95	\$2.50	\$2.40
080-611	3 mm (.12")	Red	8	2.95	2.50	2.40
080-612	3 mm (.12")	White	8	2.95	2.50	2.40
080-613	3 mm (.12")	Yellow	8	2.95	2.50	2.40
080-614	3 mm (.12")	Blue	8	2.95	2.50	2.40
080-615	3 mm (.12")	Orange	8	2.95	2.50	2.40
080-616	3 mm (.12")	Green	8	2.95	2.50	2.40
080-617	3 mm (.12")	Clear	8	2.95	2.50	2.40
080-620	6 mm (.24")	Black	5	2.95	2.50	2.40
080-621	6 mm (.24")	Red	5	2.95	2.50	2.40
080-622	6 mm (.24")	White	5	2.95	2.50	2.40
080-623	6 mm (.24")	Yellow	5	2.95	2.50	2.40
080-624	6 mm (.24")	Blue	5	2.95	2.50	2.40
080-625	6 mm (.24")	Orange	5	2.95	2.50	2.40
080-626	6 mm (.24")	Green	5	2.95	2.50	2.40
080-627	6 mm (.24")	Clear	5	2.95	2.50	2.40
080-640	12 mm (.48")	Black	4	2.95	2.50	2.40
080-641	12 mm (.48")	Red	4	2.95	2.50	2.40
080-642	12 mm (.48")	White	4	2.95	2.50	2.40
080-643	12 mm (.48")	Yellow	4	2.95	2.50	2.40
080-644	12 mm (.48")	Blue	4	2.95	2.50	2.40
080-645	12 mm (.48")	Orange	4	2.95	2.50	2.40
080-646	12 mm (.48")	Green	4	2.95	2.50	2.40
080-647	12 mm (.48")	Clear	4	2.95	2.50	2.40
080-650	18 mm (.74")	Black	3	2.95	2.50	2.40
080-651	18 mm (.74")	Red	3	2.95	2.50	2.40
080-652	18 mm (.74")	White	3	2.95	2.50	2.40
080-653	18 mm (.74")	Yellow	3	2.95	2.50	2.40
080-654	18 mm (.74")	Blue	3	2.95	2.50	2.40
080-655	18 mm (.74")	Orange	3	2.95	2.50	2.40
080-656	18 mm (.74")	Green	3	2.95	2.50	2.40
080-657	18 mm (.74")	Clear	3	2.95	2.50	2.40
080-660	24 mm (.98")	Black	2	2.95	2.50	2.40
080-661	24 mm (.98")	Red	2	2.95	2.50	2.40

3-to-1 Heat Shrink Tubing with Adhesive

- Heat shrink with a polyamide adhesive which melts and flows sealing components within
- Great for applications requiring waterproofing • 3-to-1 ratio will accommodate large and irregular shapes • 110°C shrink temperature
- Made of flexible polyolefin
- Color: black • Flame retardant
- UL recognized to 125°C, 600V
- 6" lengths.

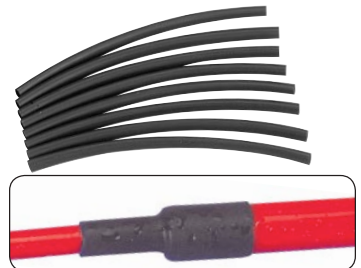

Part #	Pre-Shrink Size (I.D.)	Pkg Qty	Price (1-3)	Price (4-19)	Price (20-UP)
080-670	3 mm (.12")	8	\$6.90	\$6.40	\$6.03
080-672	6 mm (.24")	5	6.90	6.40	6.03
080-674	12 mm (.48")	4	6.90	6.40	6.03
080-676	19 mm (.75")	3	6.90	6.40	6.03
080-678	24 mm (.98")	2	6.90	6.40	6.03