

# WG1-3220TI-Nd-16

Professional Line Array Compression Driver





## KEY FEATURES


- 3" Voice coil and 1.4" exit
- 110 Watts continuous power handling
- 102 dB Sensitivity
- Die cast aluminum wave guide
- Light Weight Neodymium Magnet



Exit Throat Diameter	1.4" (35.5 mm)
Nominal Impedance	16 Ohms
<b>Rated Power Handling</b>	<b>110 Watts</b>
Program Power	220 Watts
<b>Sensitivity 4.0V at 1m*</b>	<b>102 dB</b>
Recommended High Pass Crossover**	1,500 Hz***
**for Full Power Handling      ***12 db/oct Crossover	
<b>Frequency Response at -10dB</b>	<b>1,500-19,000Hz</b>
Voice Coil Diameter	3" (76.2 mm)
Voice Coil Wire	Copper
Voice Coil Former Material	Kapton®
Diaphragm Material	Titanium
Flux Density	1.80 T
Magnet Material	Neodymium

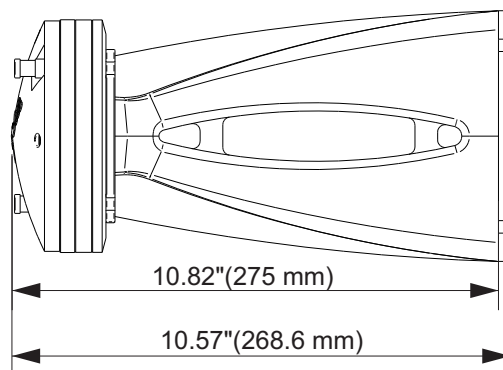

Frequency Response Measured at 4.00 V/1m

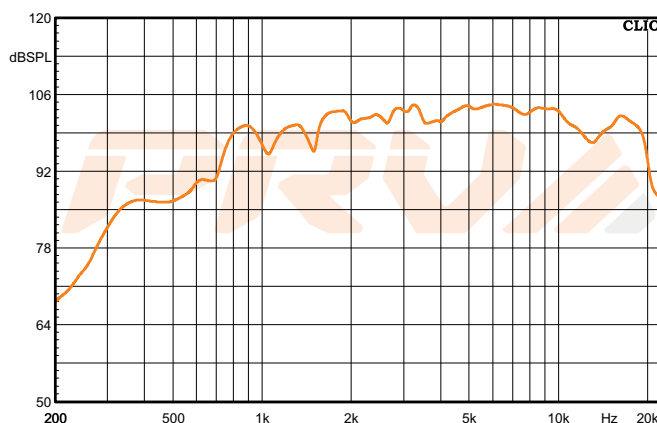

Overall depth	10.82" (275 mm)
Mounting Depth	10.57" (268.6 mm)
Overall Width	3.51" (89.3 mm)
Overall Height	5.24" (133 mm)
Net Weight	6.96 lbs (3.15 kg)
Shipping Weight	7.87 lbs (3.57 kg)
Carton Dimensions W x L x H	13.58" x 8.27" x 7.28" (345 x 210 x 185)

PRV AUDIO USA (USA and Export) PRV AUDIO BRAZIL (Brazilian Sales Only)  
FORT LAUDERDALE, FL SAO LEOPOLDO, RS  
support@prvaudio.com vendas@pvaudio.com.br  
www.prvaudio.com www.pvaudio.com.br