




# 5-1/4" Max-X High Excursion DVC Subwoofer Driver 2 Ohms Per Coil MX5-22

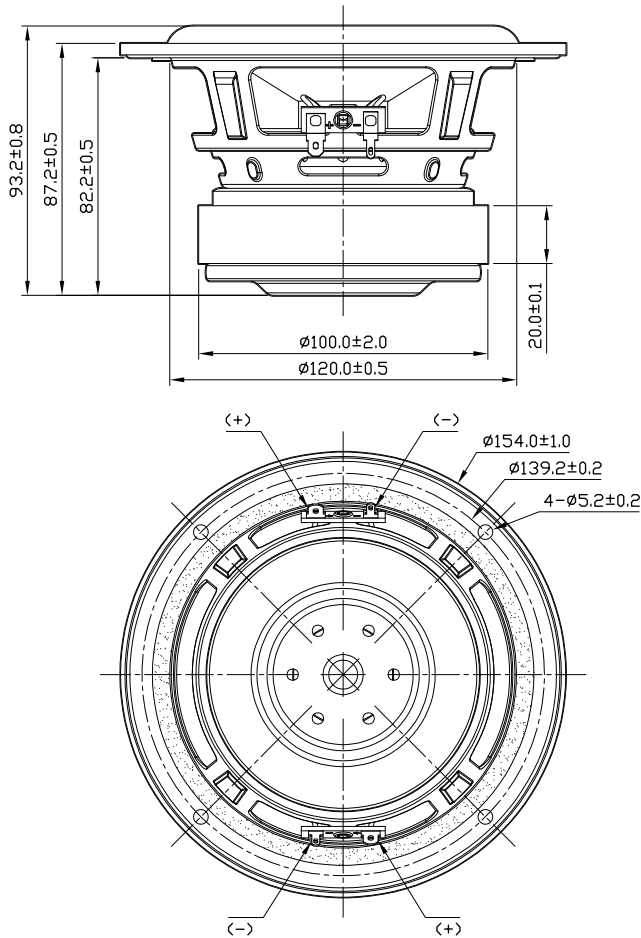

## FEATURES


- Long-throw motor and low resonance make it ideal for ultra-compact subwoofer designs
- Full-coverage concave dust cap increases stiffness while creating a modern seamless look
- Optimized suspension supports sustained high excursion with consistent output
- Extensive airflow management promotes cooler coil temperatures and reduced compression
- Precision-tooled steel frame maximizes excursion clearance while maintaining value
- Dual 2-ohm coils provide flexible wiring for extracting maximum amplifier performance

## PARAMETERS

Impedance:	2 + 2 ohms *
Re:	4.3 ohms
Le:	1.1 mH
Fs:	45 Hz
Qms:	3.02
Qes:	0.50
Qts:	0.43
Mms:	26g
Cms:	0.48 mm/N
Sd:	84.4 cm <sup>2</sup>
Vd:	79.5 cm <sup>3</sup>
BL:	8.0 Tm
Vas:	4.9 liters
Xmax:	9.3 mm **
VC Diameter:	32 mm
SPL:	84.3 dB@2.83V/1m
RMS Power handling:	50 watts
Usable Frequency Range (Hz):	30-1,000 Hz

\*Dual 2-ohm voice coils. All specifications measured with voice coils wired in series.  
\*\*at 70% BI (Klippel verified)

## IMPEDANCE/PHASE

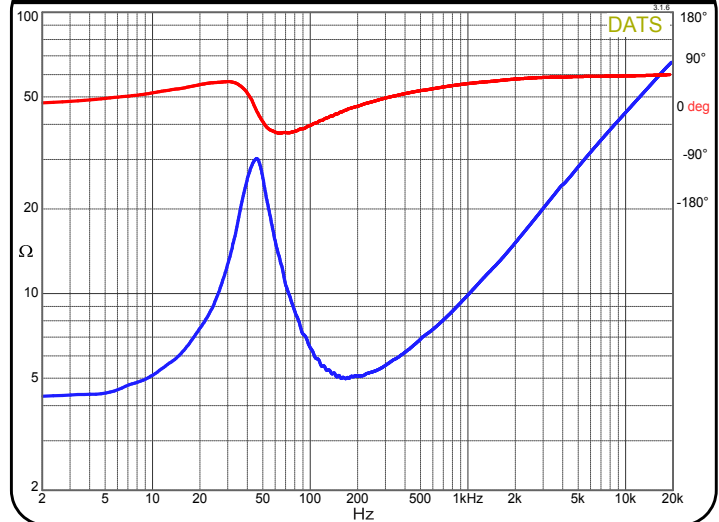

## FREQUENCY RESPONSE

